


Dear Partners:

Powertip is introducing a 5" PH800480T030-ZHR06, featuring IPS /with V com, BL power, high brightness, 3mm cover lens/OCR bonding.

Perfect for outdoor application, such as EV charger, measurement device, drone controller and solar energy controller.

■ 5" PH800480T030-ZHR06

Item	Description
Display Resolution	800 * 3 (RGB) * 480 Dots
LCD type	Full Viewing Angle, Normally Black , Transmissive type
Screen size (inch)	5.0 inch
Interface	Parallel RGB (Data), SPI (Configuration)
Optical Type	OCR
Primacy IC (TFT LCD)	Sitronix ST7262
Operating Temp.	-20 ~ +70 deg. C
Storage Temp.	-30 ~ +80 deg. C
Brightness	850 cd/m2
Life time	50000 hrs (25deg.C, IF= 200mA)
CTP IC	HYCON----HY4635
Interface	I2C

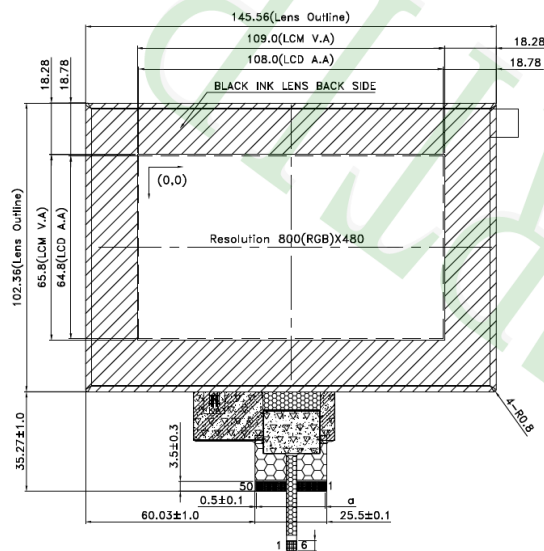

Application:
EV charger
Measurement device
Drone controller
Solar energy controller

